



# XTREME BAR PRO SERIES

64033


20" DUAL COLOR SINGLE ROW LIGHT BAR  
AUXILIARY DRIVING LIGHT + DRL

## WHAT'S INCLUDED:

- 1 X LED Light Bar
- 2 X Side Mounting Brackets
- 2 X Bottom Mounting Brackets
- Mounting Hardware


## FEATURES & SPECIFICATIONS:

- LIGHT OUTPUT: 8,900 Lumens (Per Light)
- POWER: 110W @ 13.6V DC WHITE;  
110W @ 13.6V DC YELLOW;  
110W @ 13.6V DC WHITE & YELLOW
- CURRENT: 11.0A @ 13.6V DC
- VOLTAGE: 9-36V DC
- DIMENSION: 1.5" x 19.7" x 2.8"
- BEAM PATTERN: Auxiliary Driving Beam

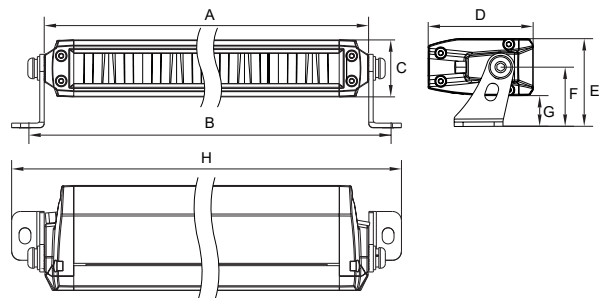


A 19.72"	B 20.75"	C 1.52"	D 2.80"
E 2.33"	F 1.57"	G 0.81"	H 21.46"

## MOUNTING BRACKET INSTALL INSTRUCTION

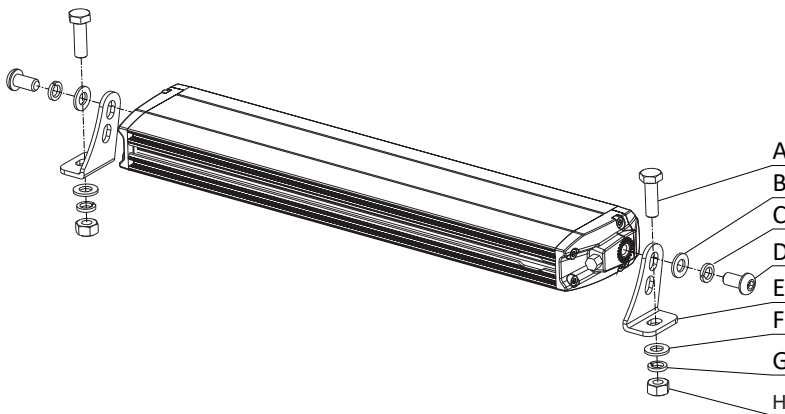


A 2PCS 	B 2PCS 	C 2PCS 	D 2PCS 
E 2PCS 	F 2PCS 	G 2PCS 	H 2PCS 

## Side Mounts

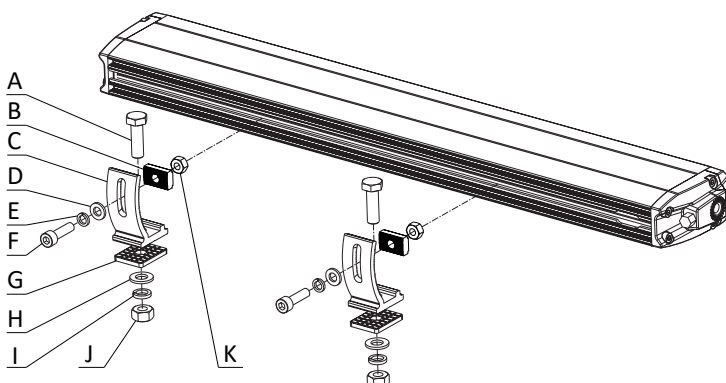

A 2PCS 	B 2PCS 	C 2PCS 	D 2PCS 
E 2PCS 	F 2PCS 	G 2PCS 	H 2PCS 
I 2PCS 	J 2PCS 	K 2PCS 	

## Bottom Mounts

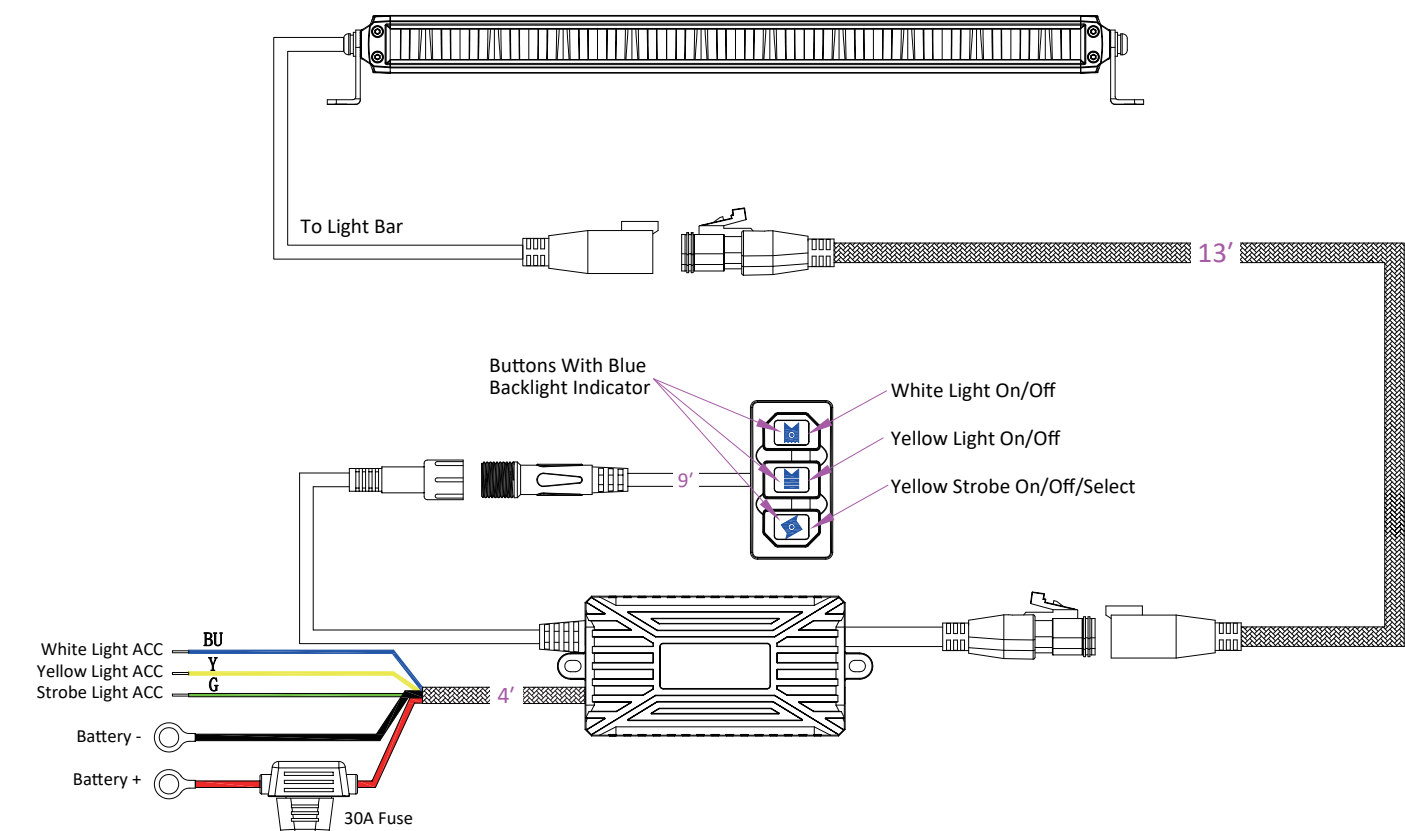

- 1. the white light switch. Press less than 1 second to turn the white light on or off. Press and hold to turn off the white light.
- 2. the yellow light switch. Press less than 1 second to turn the yellow light on or off. Press and hold to turn off the yellow light.
- 3. the yellow strobe light switch. Press less than 1 second to turn the strobe light on, and press it again to switch to the next mode. Press and hold to turn off the strobe light. The sequence of modes will repeat as follows:

Mode 1	2	3	4	5	6
DRL	Hyper burst	Rapid strobe	Slow strobe	Staggered Sequential Burst	Alternating Rapid Burst

Memory function: When turning on the light, the last used mode will be recalled.

Tips:

- ① When the white light or yellow light is activated, turning on the strobe light will automatically deactivate the respective white light or yellow light.
- ② When white or yellow main light is on, turning on the other (yellow or white main light) dims both lights by 50%. Turning off one light restores the other to full power, keeping their total power always the same.
- ③ If using auxiliary switches instead of the provided switch, connect the ACC wires to power to enable the corresponding functions.